

Commander Essential

ALL THE ESSENTIAL PERFORMANCE AND DESIGN FEATURES YOU NEED



RESIDENTIAL SECTIONAL GARAGE DOOR OPENER MYQ COMPATIBLE



KEY FEATURES

QUIET & POWERFUL

DC motor is quiet and built to last with the strength to open any branded domestic door.

LIFTING POWER

Powers doors up to 90 kg.

MYQ COMPATIBLE

Opener is myQ compatible with additional purchase of Safety IR Beams & myQ Gateway.¹



Compliant to Australian and New Zealand Standard AS/NZS 60335-2-95

SMART



MYQ COMPATIBLE TECHNOLOGY lets users create schedules, monitor, receive alerts and control the garage door opener away from home.¹



SOFT-START AND SOFT-STOP for smooth operation.

QUIET & RELIABLE



5-YEAR WARRANTY



QUIET DC MOTOR eliminates noise and vibrations through the ceiling and provide smooth operation.



HEAVY-LIFTING POWER operates doors up to 90 kgs.

SAFE & SECURE



SECURITY+ 2.0[®] sends a new code with every remote click.



PREMIUM AUTOMATIC SAFETY REVERSE function will allow your garage door to stop and reverse automatically if obstructed going down or stop going up.



TIMER-TO-CLOSE automatically closes the door after a pre-set amount of time.²



IMPROVED TRANSMITTER RANGE has up to 18% better range meaning you can start opening your garage door sooner.³



AUTOMATIC FORCE SENSING monitors and adjusts the force needed to open your garage with each operation.



MANUAL RELEASE CORD allows you to open your garage door whenever needed.

ACCESSORIES INCLUDED



2 PREMIUM+ REMOTES

Each button is independently programmable and backed by Security+ 2.0 technology.

EP60M



TWO BUTTON WIRELESS WALL BUTTON

Controls up to two garage door openers and is backed by Security+2.0 technology.

E138M

POWERFUL ADD-ONS



MYQ CONNECTIVITY BUNDLE

Add monitoring and control away from home. Includes myQ Gateway and The Protector System™ (Safety IR Beams).

M828AU774



MYQ REMOTE LED LIGHT

Ultra-bright LED light designed to illuminate your garage or workspace. Controlled by a garage door opener, remote control or myQ app.

827AU



WIRELESS SECURITY KEYPAD

Convenient and safe access to your garage without using a remote control or key.

EB40M



SINGLE BUTTON REMOTE CONTROL WITH CAR VISOR CLIP

Easily attaches to your car visor to control up to three garage doors. Backed by Security+ 2.0 technology.

EP40M



THREE BUTTON REMOTE CONTROL WITH CAR VISOR CLIP

Easily attaches to your car visor to control up to three garage doors. Backed by Security+ 2.0 technology.

EP43M

gomerlin.com.au ■ gomerlin.co.nz

¹Additional purchase of Merlin myQ Gateway and Safety IR Beams accessories required to enable myQ functionality. Visit gomerlin.com.au or gomerlin.co.nz for further information. ²Safety IR Beams must be installed to enable the use of Timer-to-Close. See User Guide for additional information. Smartphone not included. ³When compared to other available Merlin products.

Commander Essential

ALL THE ESSENTIAL PERFORMANCE AND DESIGN FEATURES YOU NEED

MS65MYQ



RESIDENTIAL SECTIONAL GARAGE DOOR OPENER MYQ COMPATIBLE

GARAGE DOOR OPENER IS COMPATIBLE WITH myQ²


Additional purchase of The Protector System™ and myQ Gateway is required

APP AVAILABLE ON:



- Monitor and control your garage door away from home through the Merlin myQ app.
- Peace of mind knowing if your garage door is open or closed anywhere and any time.
- Receive real time alerts and notifications so you know when the garage door is opened or closed by loved ones.
- Pre-set times to automatically close your garage door at any time.
- See history records of your garage door open and close periods.
- Protect your loved ones and belongings with The Protector System™ (Safety IR Beams).
- Compatible Merlin myQ app available for smart devices including Apple Watch.

TYPICAL INSTALLATION - SECTIONAL DOORS

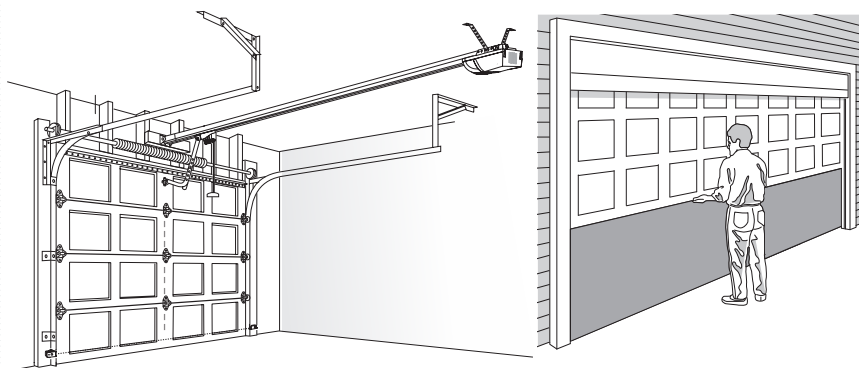

- Maximum lifting under spring tensions 20 kg
- Suitable for steel and timber spring balanced doors
- Door height: 2.4m Door width: 5.5m Total door area: 13.5m²
- Single dwelling, max door weight up to 90 kg



SECURITY



SECURITY+ 2.0®

- Encrypted rolling code across multiple frequencies.
- Security+ 2.0® technology virtually eliminates interference.

SMART



RADIO

- Provides 2-way communication from rolling door opener and accessories.
- Receiver with 64 memory registers.

ELECTRICAL



LIGHTING: LED LIGHTING

- LED light turns on with activation.
- Turns off 2.5 minutes after operation.

STANDARD SPECIFICATIONS

- Input voltage: 240V AC
- Rated door areas up to: 13.5m²
- Max door height: 2.4m
- Max door weight: 90 kg
- Max peak pulling force: 600N
- Max lift under spring tension: 20 kg
- Radio frequency: 433.30, 433.92, 434.54 MHz with Security+ 2.0 technology
- Minimum headroom required: 30mm
- C-rail with belt drive
- 24C DV motor with thermal overload protection
- Lighting: LED Lighting
- Garage Door Opener Capacity of up to 64 memory registers
- Compatible with myQ technology²

Merlin®



AUSTRALIA

Chamberlain Australia Pty Ltd
PO Box 1446
Lane Cove NSW 1595
Australia

gomerlin.com.au
1800 638 234

NEW ZEALAND

Chamberlain New Zealand Ltd
PO Box 100-221
North Shore
Auckland 0745
New Zealand

gomerlin.co.nz
0800 653 667

Designed & Engineered in Australia
© Chamberlain Group 2019. All Rights Reserved.™ Trademark of The Chamberlain Group, Inc.® Registered Trademark of The Chamberlain Group.

¹Based upon a 2.2m high door. ²This feature requires monitored Safety IR Beams to be fitted. Linking your myQ account to partner may require an additional accessory purchase or subscription fee. Apple, the Apple logo, iPhone, and iPad are trademarks of Apple Inc., registered in the U.S. and other countries and regions. App Store is a service mark of Apple Inc. Google Play and the Google Play logo are trademarks of Google LLC.